


**HEAD PROTECTION HAS EVOLVED**  
la protección de la cabeza ha **evolucinado**

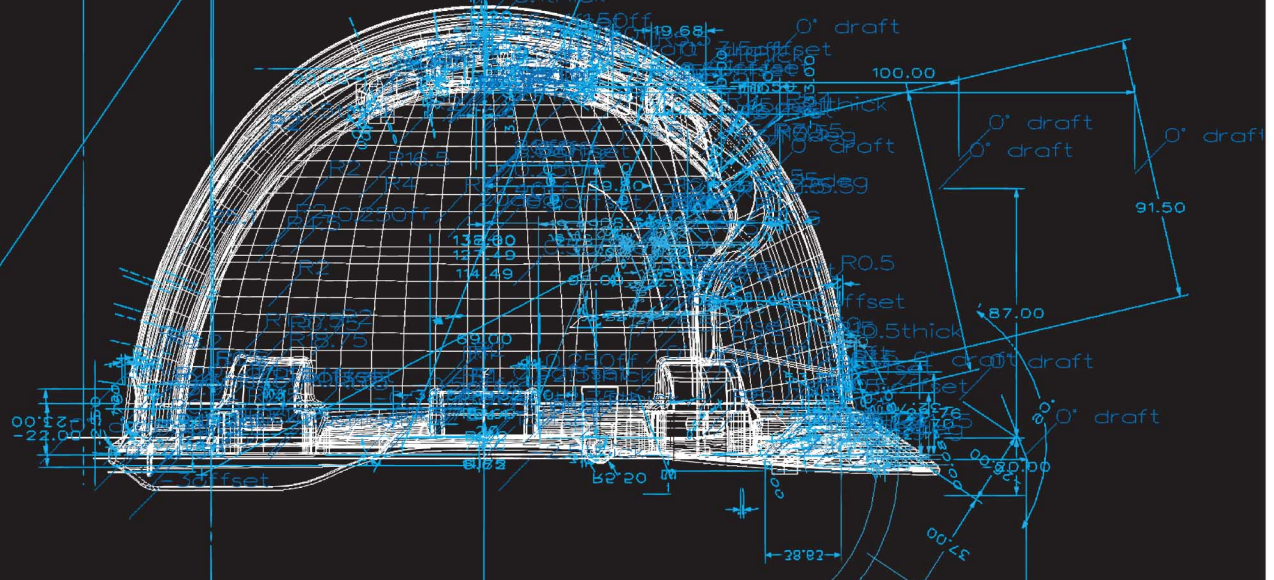

presentamos el nuevo **Mk8 EVOLUTION™**  
**INTRODUCING THE NEW Mk8 EVOLUTION™**

BS EN 397:1995		BS EN 14052:2005	
<b>TEST DE IMPACTO</b>		<b>TEST DE PENETRACIÓN</b>	
<p>5kg Striker</p> <p>1m</p> <p>IMPACT TEST. TRANSMITTED FORCE MUST NOT EXCEED 5.0kN.</p>	<p>5kg Striker</p> <p>2m</p> <p>BOTH OF THESE IMPACT TESTS FOR BS EN 14052:2005 ON ONE SHELL</p> <p>OR OR OR</p> <p>RIGHT SIDE OR REAR OR LEFT SIDE OR FRONT</p> <p>IMPACT TEST. TRANSMITTED FORCE MUST NOT EXCEED 5.0kN.</p>	<p>3kg pointed striker</p> <p>1m</p> <p>PENETRATION TEST. STRIKER MUST NOT MAKE CONTACT WITH HEADFORM.</p>	<p>1kg flat bladed striker</p> <p>2.5m</p> <p>BOTH OF THESE PENETRATION TESTS FOR BS EN 14052:2005 ON ONE SHELL</p> <p>OR OR OR</p> <p>RIGHT SIDE OR REAR OR LEFT SIDE OR FRONT</p> <p>PENETRATION TEST. STRIKER MUST NOT MAKE CONTACT WITH HEADFORM.</p>
<p>5kg Striker</p> <p>1m</p> <p>OR OR OR</p> <p>RIGHT SIDE OR REAR OR LEFT SIDE OR FRONT</p> <p>OFF-CROWN IMPACT TEST. ONLY 1 SIDE IS TESTED (FRONT, REAR OR SIDE). HELMET POSITION BETWEEN 15° - 60°. DECELERATION MUST NOT EXCEED 300G.</p> <p>TEST DE IMPACTO. LA FUERZA TRANSMITIDA NO DEBE EXCEDER 5,0 kN.</p>		<p>1kg flat bladed striker</p> <p>2m</p> <p>OR OR OR</p> <p>RIGHT SIDE OR REAR OR LEFT SIDE OR FRONT</p> <p>OFF-CROWN PENETRATION TEST. ONLY 1 SIDE IS TESTED (FRONT, REAR OR SIDE). HELMET POSITION BETWEEN 15° - 60°. STRIKER MUST NOT MAKE CONTACT WITH HEADFORM.</p> <p>EN LA NUEVA NORMA SE SOMETE A LA MISMA UNIDAD A UN ÚNICO TEST DE IMPACTO FUERA DE LA CORONA (EN LA FRENTE, LADO O TRASERA), POSICIÓN DEL CASCO ENTRE 15°-60°. DECELERACIÓN NO SUPERIOR A 300G.</p> <p>TEST DE PENETRACIÓN FUERA DE LA CORONA, SÓLEMENTE SE COMPRUEBA UN LADO (FRENTE, TRASERA O LATERAL). LA POSICIÓN DEL CASCO PERMANECE ENTRE 15°-60°. LA PESA NO DEBE CONTACTAR CON LA CABEZA</p>	